


Horizontal & Vertical design, H & V models

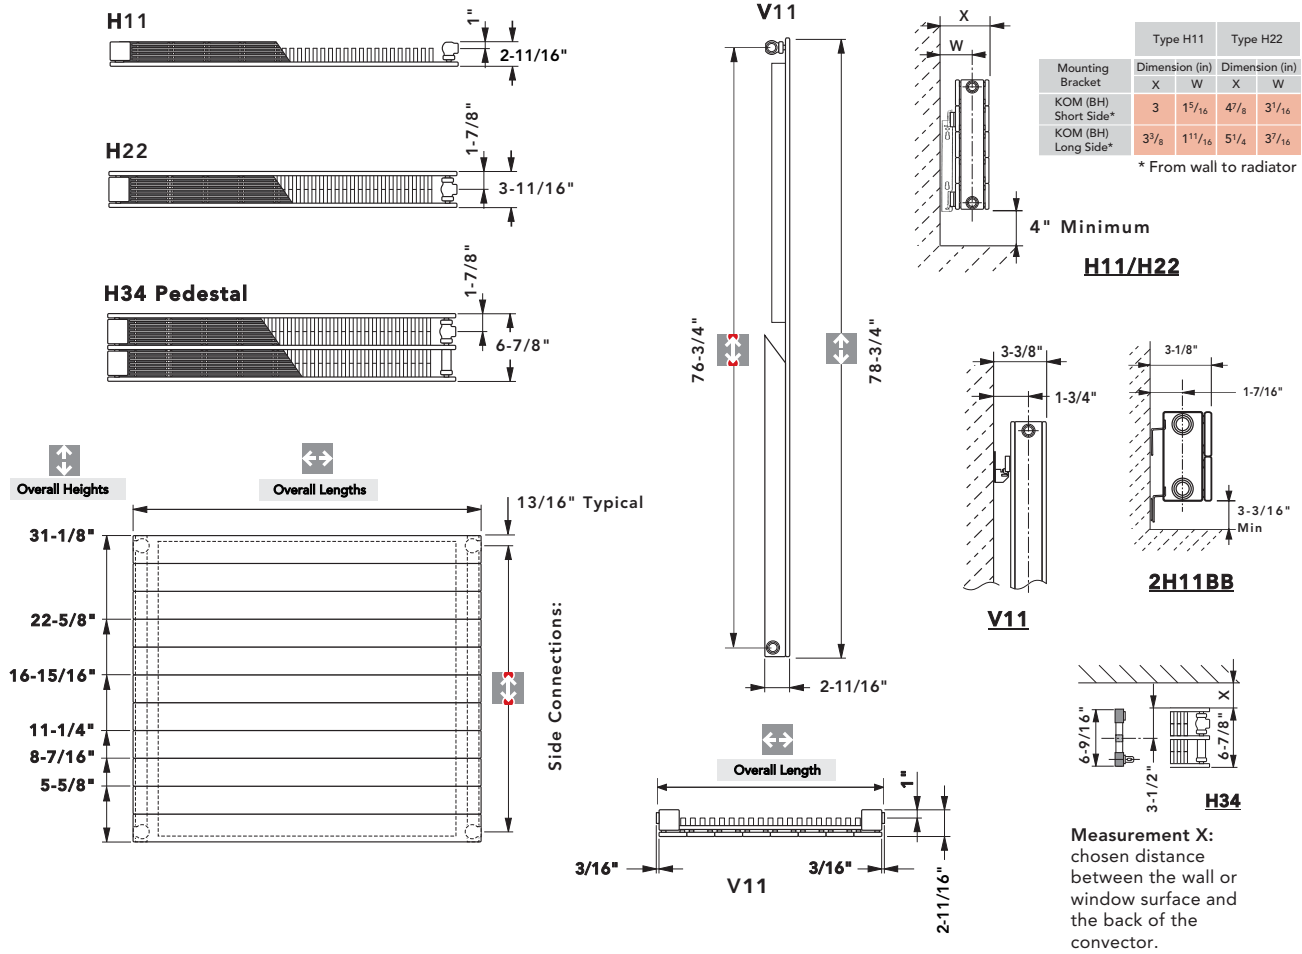

Model Length (cm)	**060	**080	**090	**100	**120	**140	**160	**180	**200	**220	**240	**300	VERTICAL MODELS	5V11	6V11	8V11	10V11
Nominal Length (in)	23-5/8"	31-1/2"	35-7/16"	39-3/8"	47-1/4"	55-1/8"	63"	70-7/8"	78-3/4"	86-5/8"	94-1/2"	118-1/8"		14-1/8"	16-15/16"	22-5/8"	28-1/4"

All Dimensions are nominal

Btuh/FT at Listed AWT and EAT of 70° F.

Model	Height	Connections 2 per side	180°F	170°F	160°F	150°F	140°F	130°F	120°F	Weight (lbs/ft)	Wtr Content gals/ft
2H11	5-5/8"	1/2" BSP	627	558	489	420	351	282	213	5.25	.09
3H11	8-7/16"	1/2" BSP	791	705	618	531	443	357	271	7.62	.13
4H11	11-1/4"	1/2" BSP	985	877	769	661	552	444	336	9.75	.18
6H11	16-15/16"	1/2" BSP	1,466	1,305	1,143	982	821	660	498	13.34	.26
8H11	22-5/8"	1/2" BSP	1,778	1,582	1,387	1,191	996	800	605	17.57	.36
11H11	31-1/8"	1/2" BSP	2,106	1,885	1,663	1,442	1,197	976	755	22.54	.49
6H22	16-15/16"	1/2" BSP	2,740	2,439	2,137	1,836	1,535	1,234	933	24.82	.54
8H22	22-5/8"	1/2" BSP	3,246	2,889	2,532	2,175	1,818	1,461	1,104	32.94	.72
11H22	31-1/8"	1/2" BSP	3,848	3,425	3,001	2,578	2,155	1,732	1,309	42.38	.99
2H34	ADJUSTABLE PEDESTAL	1/2" BSP	2,026	1,803	1,580	1,357	1,135	912	689	16.08	.26
4H34	ADJUSTABLE PEDESTAL	1/2" BSP	3,324	2,959	2,593	2,228	1,862	1,497	1,132	31.20	.54
5V11	78-3/4"	1/2" BSP	4,009	3,568	3,127	2,686	2,245	1,804	1,363	49.52	1.12
6V11	78-3/4"	1/2" BSP	4,018	3,576	3,134	2,692	2,250	1,808	1,366	49.52	1.12
8V11	78-3/4"	1/2" BSP	4,013	3,572	3,130	2,689	2,247	1,806	1,365	49.52	1.12
10V11	78-3/4"	1/2" BSP	4,018	3,576	3,134	2,692	2,250	1,808	1,366	49.52	1.12